

PanL35 (PD35) Touch Display Datasheet



1 Introduction

The PanL35 Touch Display provides users an intuitive interface option to monitor and trigger control events when working alongside PanL Hub. Unlike mobile devices that usually requires recharging, the display can be placed at highly accessible areas with continuous power supply from PanL Hub through an Ethernet cable. PD35 is built with 3.5 inch full color TFT LCD powered by Bridgetek's very own Embedded Video Engine (EVE) Graphic Controller chip that enables rich and intuitive multi touch GUIs displays.

1.1 Features

PanL35 (PD35) has the following features:

- Integrated FT903Q 32-bit RISC microcontroller (MCU) with high speed performance
- In-built advanced FT811 graphics controller with display, touch and audio functionality
- 3.5" high brightness TFT LCD (320*480 pixels) with capacitive five touch supported

- Built In Buzzer
- Two RJ45 Ports support RS485 Interface to PanL Hub, PanL Terminator, daisy chain to another PanL35 Touch Display or other PanL Devices
- Powered by PanL Hub at 24V DC Input through either RJ45 ports
- Operating temperature range : 0°C to +55°C



2 Ordering Information

Part No.	Description
PD350000A	3.5" PanL Portrait LCD Display

Table 1 – PanL35 (PD35) Parts Number

Table of Contents

1	Introduction	1
1.1	Features.....	1
2	Ordering Information	2
3	Specifications.....	4
4	Hardware Features.....	5
4.1	Power Supply	7
4.2	Microcontroller.....	7
4.3	Graphic Controller.....	7
4.4	LED Indicator	7
4.5	RJ45 Port	7
4.6	ID Switch	8
4.7	Reset Button	8
4.8	Micro USB	8
4.9	Single Wire Debug	8
4.10	Buzzer.....	8
5	Mechanical Dimensions	9
6	Contact Information.....	10
	Appendix A - References	11
	Document References	11
	Acronyms and Abbreviations	11
	Appendix B - List of Figures and Tables	12
	List of Figures	12
	List of Tables.....	12
	Appendix C – Revision History	13

3 Specifications

PLATFORM	Microcontroller	FT903Q
	Graphic Controller	FT811
DISPLAY	Display Size	3.5 inch TFT LCD
	Display Type	Capacitive touch panel
	Number of Pixels	320 (RGB) x 480
	Active Display Area	48.96 (H) x 73.44 (V) mm
	Light Intensity (Brightness)	700 cd/m ²
	Display Colour	65K / 262K colors
	Viewing Angels	80°
FEATURES	Sound Alert	90 dB buzzer @3.1khz
	Reset Button	Push Switch
	Device Indicator	RGB LED
	Single Wire Debug	Reserved for factory use only
POWER & CONNECTIVITY	Input Voltage	DC 9-24V
	Connectivity	2x RJ45 Ports
	Micro USB	Reserved for factory use only
PHYSICAL CHARACTERISTICS	Color	White
	Housing	Polycarbonates
	Dimensions	116 x 86 x 17 mm
	Weight	146g
ENVIRONMENTAL LIMITS	Operating Temperature	0 to 55°C
	Storage Temperature	0 to 70°C
	Ambient Relative Humidity	20 to 85% (non-condensing)
STANDARDS & CERTIFICATIONS	EMC (FCC/CE)	EN 55032:2015+AC:2016 Class B CISPR 32:2015+C1: 2016 Class B EN 55035:2017 FCC PART 15, Subpart B
PACKAGE CONTENTS	Hardware Components	1x PD35 2x Self Tapping Screws (Arlington LV1 Wall Mounting)
	Documentation	1x Quick Start Guide

Table 2 – PanL35 (PD35) Touch Display Specifications

4 Hardware Features

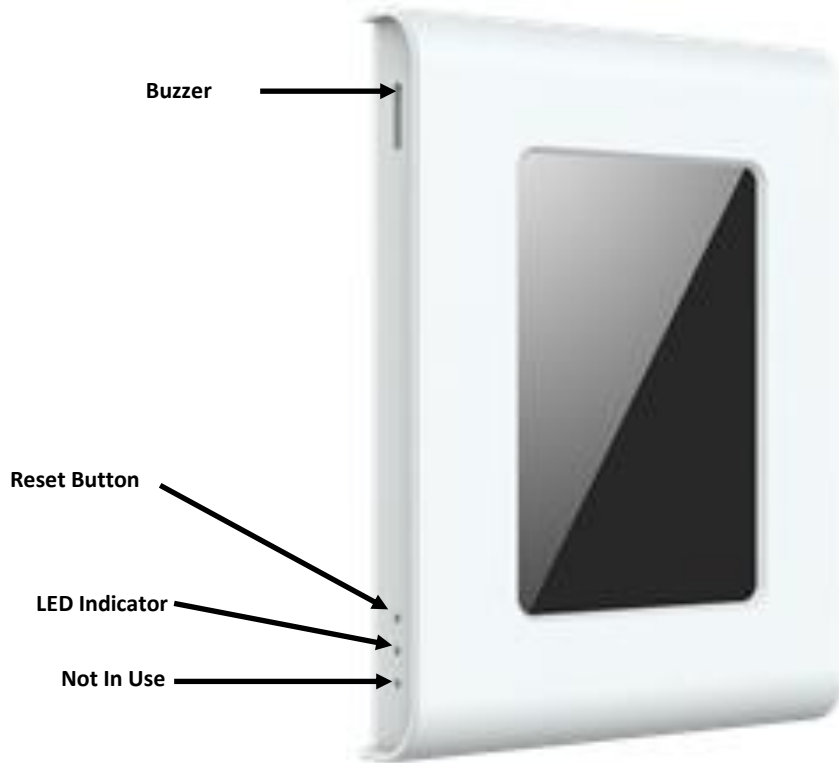


Figure 1 - PanL35 (PD35) Touch Display Front View

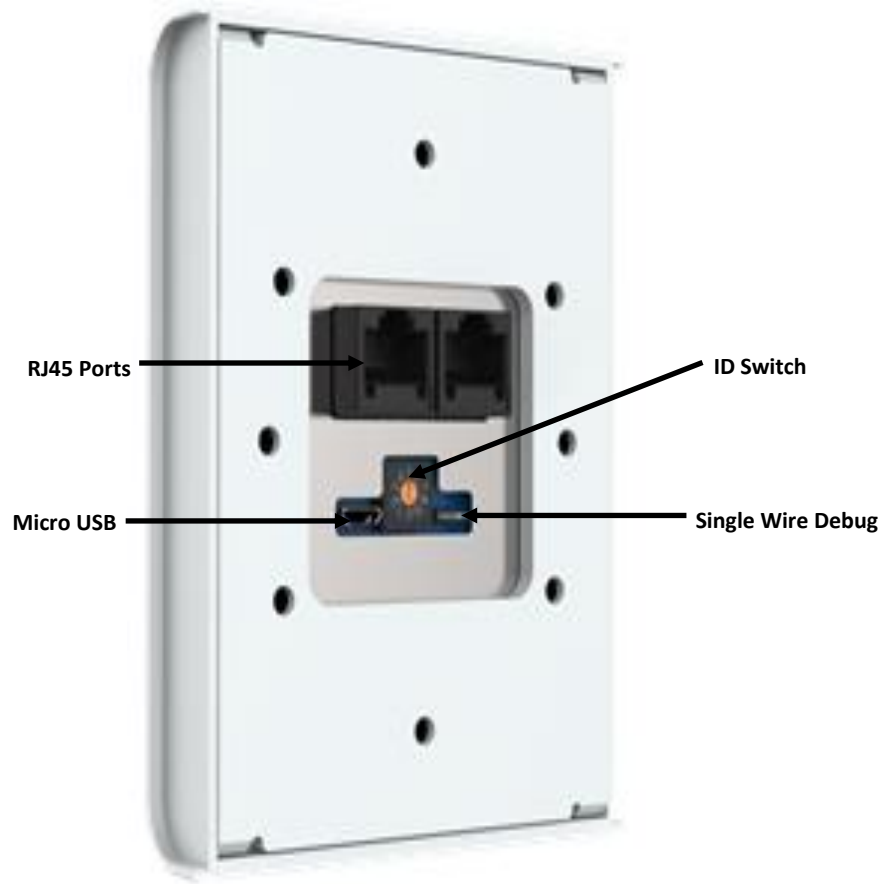


Figure 2 – PanL35 (PD35) Touch Display Rear View

4.1 Power Supply

The PD35 receives power externally from Hub through either RJ45 ports. Input supply voltage is 9V DC to 24V DC (nominally 24V, 500mA from Hub).

4.2 Microcontroller

The [FT9030](#) 100-pin QFN microcontroller which is provided on the board belongs to the 32-bit FT90X Super Bridging Microcontroller family from [Bridgetek](#).

4.3 Graphic Controller

The [FT811](#) is Bridgetek’s very own Advanced Embedded Video Engine (EVE) with high resolution graphics and video playback. FT811 functionality includes graphic control, audio and touch control interface.

4.4 LED Indicator

An LED indicator that indicates the functioning status of the PD35. Refer to the table given below –













Status	LED Color (Normal Mode)		LED Color (Failsafe Mode)	
Booting Up	Red		Red	
Boot Success	Green		Red (Blink – slow speed, twice a second)	
Lost Link To Hub	Yellow		Red (Blink – medium speed, five times a second)	
While communicating with Hub	Green (Blink – fast speed, ten times a second)		Red (Blink – fast speed, ten times a second)	
Waiting for Recovery	NA	NA	Red <-> Green (Alternate blink – slow speed, twice a second)	
Recovery in Progress	NA	NA	Red <-> Yellow (Alternate blink – slow speed, twice a second)	
Recovery Done	NA	NA	Green (Blink – fast speed, ten times a second)	
Waiting for Configuration	Yellow (Blink – slow speed, twice a second)		NA	NA

Table 3 – LED Status Indicator

4.5 RJ45 Port

The RJ45 ports are used either as an input or output terminal that is connected to the Hub, other PanL Devices or another PD35 as illustrated in the picture. For single PD35 connection to a PanL Hub port, the maximum length of the RJ45 8P8C cable is 100 meters. Connect the PanL terminator provided in PanL Hub box to the unconnected PD35 port. For multiple PD35 connections to a single PanL Hub port, the first connection to PanL Hub and the subsequent connections in between the PD35 displays must not exceed 50 meters in cable length each. A single PanL Hub port can support up to three PanL35. The total combined cable lengths must not exceed 100 meters. Connect the terminator provided in PanL Hub box to the last unconnected PD35 port.

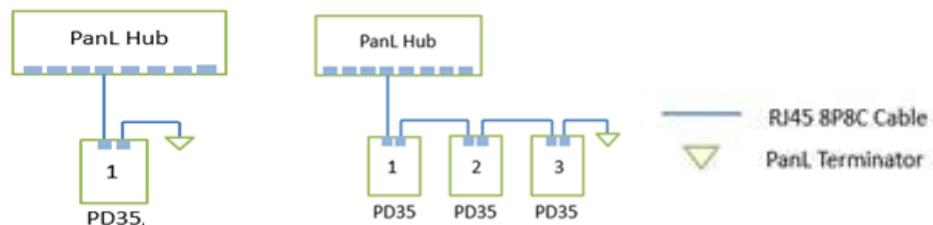


Figure 3 – Daisy Chain Network

4.6 ID Switch

For multiple PD35 connections to a single PanL Hub port, the ID switch at the back of the displays must be configured to be unique. Using a Philip head screw driver, set a unique number for each device between 0-7 (8-9 are reserved). For example, if connecting 3 PD35 to a PanL Hub port, you may set it as **0, 1, and 2**. Displays connected to different PanL Hub ports can share the same unique number. A maximum of 2 PanL devices is allowed for daisy chain if there are more than 1 PD70, PD70PLUS or PD50 device or any combination of these present. Any other combinations will have a maximum limit of three devices.

4.7 Reset Button

It is a device reset pin which is used to restart the PD35.

4.8 Micro USB

This is reserved for factory use.

4.9 Single Wire Debug

This is reserved for factory use.

4.10 Buzzer

Trigger sound to user to signify an event.

5 Mechanical Dimensions

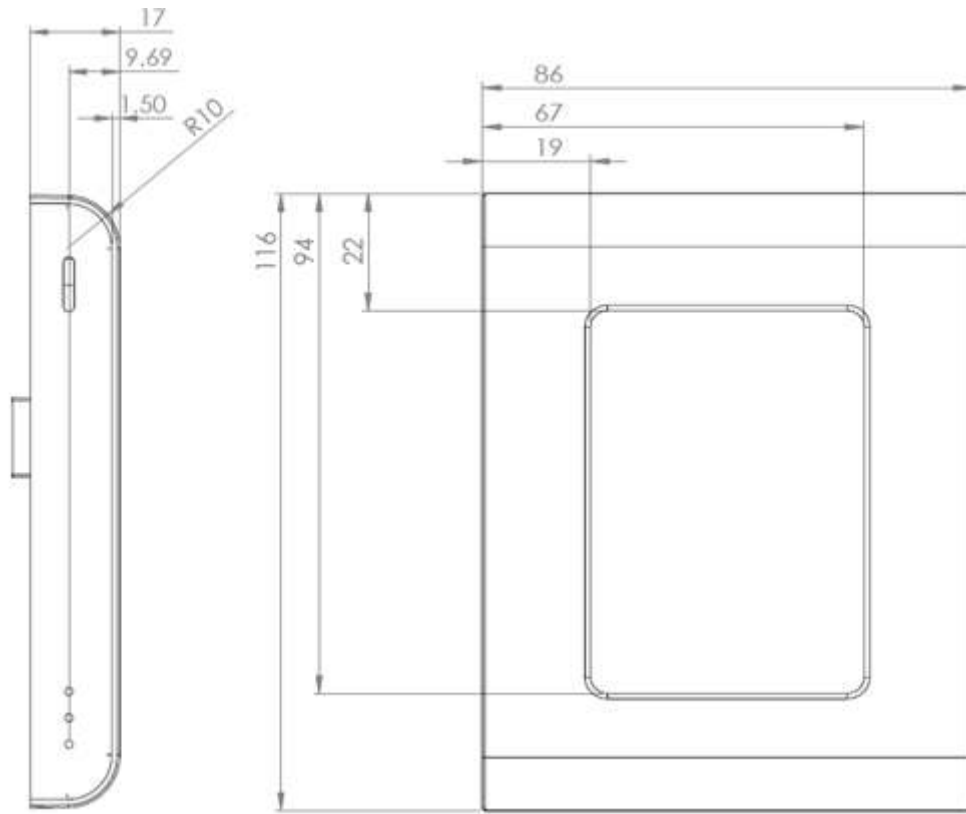


Figure 4 – PanL35 (PD35) Touch Display Dimensions

6 Contact Information

Head Quarters – Singapore

Bridgetek Pte Ltd
178 Payar Lebar Road, #07-03
Singapore 409030
Tel: +65 6547 4827
Fax: +65 6841 6071

E-mail (Sales) sales.apac@brtchip.com
E-mail (Support) support.apac@brtchip.com

Branch Office – Taipei, Taiwan

Bridgetek Pte Ltd, Taiwan Branch
2 Floor, No. 516, Sec. 1, Nei Hu Road, Nei Hu
District
Taipei 114
Taiwan, R.O.C.
Tel: +886 (2) 8797 5691
Fax: +886 (2) 8751 9737

E-mail (Sales) sales.apac@brtchip.com
E-mail (Support) support.apac@brtchip.com

Branch Office - Glasgow, United Kingdom

Bridgetek Pte. Ltd.
Unit 1, 2 Seaward Place, Centurion Business Park
Glasgow G41 1HH
United Kingdom
Tel: +44 (0) 141 429 2777
Fax: +44 (0) 141 429 2758

E-mail (Sales) sales.emea@brtchip.com
E-mail (Support) support.emea@brtchip.com

Branch Office – Vietnam

Bridgetek VietNam Company Limited
Lutaco Tower Building, 5th Floor, 173A Nguyen Van
Troj,
Ward 11, Phu Nhuan District,
Ho Chi Minh City, Vietnam
Tel : 08 38453222
Fax : 08 38455222

E-mail (Sales) sales.apac@brtchip.com
E-mail (Support) support.apac@brtchip.com

Email Address: panl-support@brtchip.com

Website: <http://panl.brtchip.com/>

System and equipment manufacturers and designers are responsible to ensure that their systems, and any Bridgetek Pte Ltd (BRTChip) devices incorporated in their systems, meet all applicable safety, regulatory and system-level performance requirements. All application-related information in this document (including application descriptions, suggested Bridgetek devices and other materials) is provided for reference only. While Bridgetek has taken care to assure it is accurate, this information is subject to customer confirmation, and Bridgetek disclaims all liability for system designs and for any applications assistance provided by Bridgetek. Use of Bridgetek devices in life support and/or safety applications is entirely at the user's risk, and the user agrees to defend, indemnify and hold harmless Bridgetek from any and all damages, claims, suits or expense resulting from such use. This document is subject to change without notice. No freedom to use patents or other intellectual property rights is implied by the publication of this document. Neither the whole nor any part of the information contained in, or the product described in this document, may be adapted or reproduced in any material or electronic form without the prior written consent of the copyright holder. Bridgetek Pte Ltd, 178 Paya Lebar Road, #07-03, Singapore 409030. Singapore Registered Company Number: 201542387H.

Appendix A - References

Document References

NA

Acronyms and Abbreviations

Terms	Description
EVE	Embedded Video Engine
FCC	Federal Communications Commission
LCD	Liquid Crystal Display
LED	Light Emitting Diode
MCU	Microcontroller Unit
QFN	Quad Flat No Leads Package
RGB	Red Green Blue
TFT	Thin Film Transistor
USB	Universal Serial Bus

Appendix B - List of Figures and Tables

List of Figures

Figure 1 - PanL35 (PD35) Touch Display Front View	5
Figure 2 - PanL35 (PD35) Touch Display Rear View	6
Figure 3 - Daisy Chain Network.....	7
Figure 4 - PanL35 (PD35) Touch Display Dimensions	9

List of Tables

Table 1 - PanL35 (PD35) Parts Number	2
Table 2 - PanL35 (PD35) Touch Display Specifications	4
Table 3 - LED Status Indicator	7

Appendix C – Revision History

Document Title: PanL35 (PD35) Touch Display Datasheet
Document Reference No.: BRT_000286
Clearance No.: BRT#149
Product Page: <https://panl.brtchip.com>
Document Feedback: [Send Feedback](#)

Revision	Changes	Date
Version 1.0	Initial Release	2019-12-31